

Compact 3-channel UHF/LTE 450 MHz Tx/Rx Combiner

DESCRIPTION

- An integrated single tray combining solution housing a 3-channel hybrid Tx hybrid combiner, duplex filter, active Rx multicouplers and preselector.
- Built-in power supply suitable for 12 VDC
- Minimal rack space required - only 3 HU in a 19" rack.
- Compatible with digital 6.25 kHz channel spacing.
- Single Tx isolators fitted as standard (With Dual Isolators, please ask for availability).
- 3 Tx & 4 Rx ports as standard. Rx port no. 4 fitted with a 1 W load
- Please specify Tx/Rx frequencies when ordering.
- Please Note: Power Supply AC to DC is not included, must be ordered separately, see Accessories.
- As standard the combiner will come with black painted front plate. If requested, please ask for a front plate with alu-look.




UPDATED PICTURE COMING SOON

SPECIFICATIONS

Electrical	
Model	PRO-COM450-3
Frequency	L : 380 - 400 MHz H : 406 - 470 MHz
Max. Input Power	50 W (per channel)
Spacing Tx-Rx	≥ 5 MHz
Spacing Tx-Tx	≤ 2 MHz
Isolation Tx - Rx	Tx - Tx spacing < 0.5 MHz : > 85 dB Tx - Tx spacing > 0.5 MHz : > 65 dB
Insertion Loss Tx Path	7.4 dB
Impedance	50 Ω
Ant-Tx Isolation	> 40 dB @ 25 °C
Isolation Rx-Rx	> 20 dB
Isolation Tx-Tx	> 70 dB @ 25 °C
VSWR	< 1.5:1
Current Consumption	500 mA @ 12 V DC
LNA Noise Figure	< 3.5 dB
Gain Rx	1 dB ±1 dB (factory set)
No. of channels	3
Mechanical	
Connection(s)	N(f)
Dimensions	19" x 3 HU (483 x 132.55 mm) / 19 x 5.22 in. - see Mechanical Outline for depth of tray
Weight	Approx. 8.5 kg / 18.74 lb.
Environmental	
Storage temperature range	-30 °C to +60 °C

MECHANICAL OUTLINE

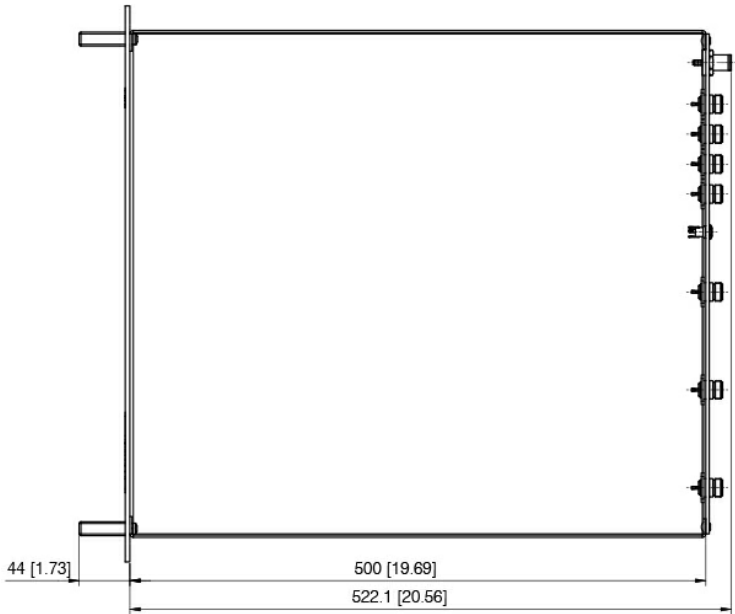

All dimensions are given in mm [in.]

ORDERING DESIGNATIONS

CONTACT FOR SYSTEM-SPECIFIC PRODUCT NO.

Use the guide below to make the name of the PRO-COM450-3. Remember to buy the Power Adaptor separately if needed.

Model	Duplex Filter Freq. Band	Pre-selector Rx Freq. Band	Duplex filter Bandwidth (BW) and Tx/Rx Spacing	Max. Input Power
PRO-COM450-3	Low : 340 - 400 MHz = L High : 406 - 470 MHz = H	380 - 440 MHz = L 430 - 470 MHz = H	2-5/7-2 * 2-7/9-2 2-9/13-2 2-13/16-2 * Max. Low BW: 2 MHz- Tx/Rx spacing: 5 to 7 MHz - Max. High BW: 2 MHz = 2-5/7-2	50 W per channel
Naming Example				
PRO-COM450-3	H	H	/2-5/7-2	/50W

Naming Example: PRO-COM450-3 HH/2-5/7-2/50W

ACCESSORIES

Model	Product No.
Power Supply AC/DC 12V/1A EU/UK/US	240000060

POWER SUPPLY AC/DC 12V/1A EU/UK/US

EU AND UK DECLARATION OF CONFORMITY

Hereby Amphenol Procom declare that the product type PRO-COM450-3 is in compliance with EU Directive 2014/53/EU and the UK Radio Equipment Regulations 2017 (S.I. 2017 No. 1206). The full text of the Declaration of Conformity is available at:

<https://amphenolprocom.com/images/shop/catalog/pdf-for-catalogues/Declaration-of-Conformity-PRO-COM450.pdf>

